


Range of Converters for USB charging

- **DC/DC or AC/DC Railway converters**
- **Input range 24-110VDC or 100-230VAC**
- **Output 5VDC with cable losses compensation**
- **2.4A per USB output**

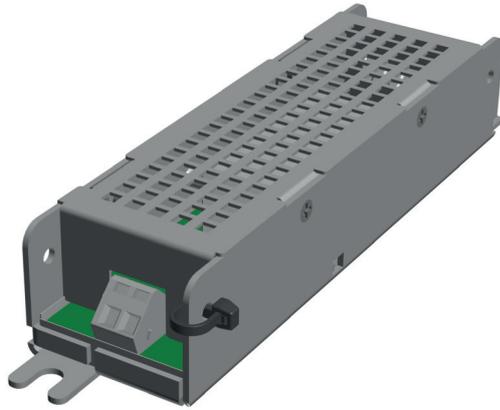

Standards:

- Product : EN62684, EN62680
- Application : EN50155
- EMC : EN50121-3-2
- Shock and vibration : EN61373
- Fire and Smoke : EN45545-2
- ROHS, REACH

Mechanical characteristics:

- Operating temperature: -25°C (-13°F) to + 55°C (+131°F)
- Cable losses compensation up to 3 m (118.11 in)
- Spring terminal connection up to 1.5mm² (AWG16) for flexible conductor with ferrule
- IP2x
- Dimensions and weight, see table below

Electrical characteristics:

- 3 variant converters:
 1. 100-230VAC/5VDC – 1 output 2.4A
 2. 24-36VDC/5VDC – 2 outputs 2.4A
 3. 72-110VDC/5VDC – 2 outputs 2.4A
- Galvanic insulation In/Out, In/Frame: 1500V/3mm (0.12 in)
- Short-circuit and overload protection
- Inrush current limitation
- MTBF > 500 000 hours


Mounting / Connection:

- Standard fixation by 2 screws or 2 studs with nut, M4 or M5, n°8-32 UNC or n°10-24 UNC
 - Alternative fixation with adapted bracket
- Mechanical fixation of wires on the casing with hose clamp

Options:

- Higher IP level study on demand based on mechanical envelope adaptation
- Other connection type on demand

Schematics:

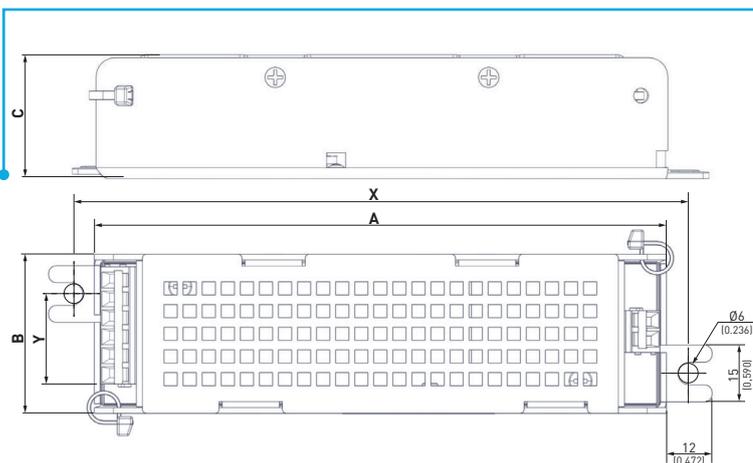

Labels: mm (in) g (lb)

CVS	A	B	C	X*	Y	Weight
1	150 (5.906)	42 (1.654)	33 (1.299)	162-165 (6.378 - 6.496)	21 (0.827)	210 (0.463)
2	165 (6.496)	60 (2.362)	33 (1.299)	177-180 (6.969 - 7.087)	39 (1.535)	350 (0.772)
3	165 (6.496)	60 (2.362)	33 (1.299)	177-180 (6.969 - 7.087)	39 (1.535)	350 (0.772)

* The longer distance X is mandatory for a fixation with stud M5 or n°10-24 UNC